

Models MIGI 602 HBE OPEN BASE and MIGI 602 LBE OPEN BASE

INTEGRATED GENERATOR WITH COMPRESSOR – OPEN Version

Engine	HONDA mod. GX 390
Power / RPM	6,4 kW (8,6 HP) / 3.000 rev/min
Engine	LONCIN mod. G 420
Power / RPM	7,5 kW (10.1 HP) / 3.000 rev/min
Fuel	Gasoline
Fuel Tank	6,1 l
Fuel Consumption	2,5 l/h
Ignition	Electric
Cooling	Forced Air
Fume Exhaust	Positioned on the right side

GENERATOR


Alternator	115/230 V Single-Phase
Alternator	400 V Three-Phase (Optional)
Power / Frequency	5,0 kVA / 50 Hz (Single-Phase)
Power / Frequency	6,0 kVA / 50 Hz (Three-Phases + Single-Phase)
Power with AUX Service	1,0 kVA

COMPRESSOR

Compressor	Twin Cylinders
Revolutions per Minute (RPM)	1,150 rev/min
Air Production	870 l/min – 52,2 m ³ /h
Max. Pressure	11 bar – 160 PSI
External Tank (Aluminim)	80 l

GENERAL FEATURES

Dimensions L x W x H	1,250 x 500 x 700 mm
Weight	175 kg
Protection Class	IP 23

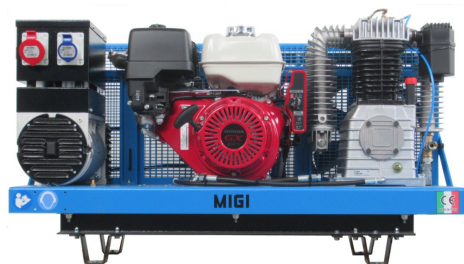

Model MIGI 602 HBE/O BASIC

80 l aluminum tank (Ø 310 x 1.250 mm, weight 12 kg) complete with quick connections, safety valve and pressure gauge

